

## APPLICATION AREAS



For more information, please contact:

Dubai : Tel. 04 203 6888  
Sharjah : Tel. 06 533 1513  
Fujairah : Tel. 09 222 3187  
RAK : Tel. 07 222 3622  
Mussafah : Tel. 02 555 4401

E-mail: [sales@ctc-uae.com](mailto:sales@ctc-uae.com) Web: [www.ctc.ae](http://www.ctc.ae)

Authorised Distributor

الشركة التجارية المركزية ذ.م.م.  
CENTRAL TRADING COMPANY L.L.C.  
Established 1957  
A Member of Al Rostamani Group



**M Series**  
Floor Standing AC

مكيفة سبليت  
فئة M


## مكيف عمودي T3 R410A بارد فقط

تتمتع شركة Blue Star الرائدة في مجال تكييف الهواء في الهند بخبرة تزيد عن 7 عقود في مجال التبريد والتكييف، وتقدم مُكيف الهواء العمودي المُتطور الذي يتميز بكفاءته العالية ويُقدم راحة لا مثيل لها. ويأتي مزوداً بالعديد من المميزات الأخرى مثل المبخر ذهبي الزعانف ووضعية النوم والتغطية الواسعة وتشخيص الأعطال الذاتي والحماية التلقائية والأنابيب الطويلة المرنة وإمكانية قفل درجة الحرارة. وقد صُمم ليتحمل الظروف المناخية القاسية.

## T3 R410A Cool Only Floor Standing AC

Blue Star, India's leading air conditioning company with over 7 decades of experience in cooling, presents the Floor Standing AC with robust technology, an air conditioner that defines higher efficiency and superior comfort. It comes with several other features like Gold Fin Evaporator, Sleep mode, Wide angle coverage, Self-diagnosis, Auto protection, Long piping flexibility and Temperature lock. It has been designed in a way to withstand harsh climatic conditions.

### Features

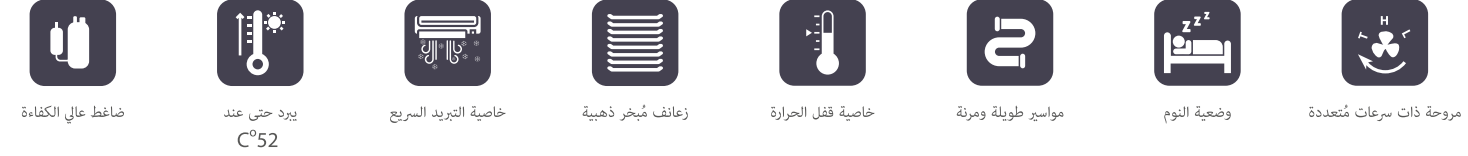

### الخصائص

### Certification



### الشهادات

Model No	UAE	VC36CYFA3-01	VC48CSFA3-01	VC60CSFA3-01
	OMAN	NA	NA	VC60CSFA3I-02 VC60CSFA3O-02
	BAHRAIN	NA	NA	VC60CSFA3I-04 VC60CSFA3O-04
Performance Parameters	Voltage / Frequency / Phase	220 - 240~ V / 50Hz / 1 Ph	380 - 415~ V / 50Hz / 3 Ph	380 - 415~ V / 50Hz / 3 Ph
	Star Rating - UAE	1 star	1 star	2 star
	Star Rating - OMAN	-	-	7 star
	Rated Cooling Capacity (BTU/h) @ T3	29200	43000	48000
	Rated Power Input (Watt) @ T3	3500	5350	5550
	Rated EER - (BTU/h/Watt) @ T3	8.34	8.04	8.65
	Rated Cooling Capacity (BTU/h) @ T1	33000	48000	54000
	Rated Power Input (Watt) @ T1	2980	4400	4520
	Rated EER - (BTU/h/Watt) @ T1	11.07	10.91	11.95
	Moisture Removal (Liters/Hour)	3.6	4.8	5.5
Air Flow Volume (CFM) (Turbo/High/Low)	1200 / 1124 / 971	1409 / 1341 / 1081	1412 / 1341 / 1147	
Noise Level Indoor (High/Low) in dB(A)	51 / 44	57 / 51	57 / 53	
Features	Filter Configuration	Dust Filter	Dust Filter	Dust Filter
	Evaporator Fins	Hydrophillic Gold Fins	Hydrophillic Gold Fins	Hydrophillic Gold Fins
	Condenser Type	Copper Condenser	Copper Condenser	Copper Condenser
	IDU Dimension (W x H x D) mm	610 x 1925 x 390	610 x 1925 x 390	610 x 1925 x 390
Dimensions, Weight & Input Power Supply	Net Weight IDU (kg)	56	57	57
	Input Power Supply	Outdoor Unit	Outdoor Unit	Outdoor Unit
	ODU Dimensions (W x H x D) mm	946 x 810 x 410	900 x 1170 x 350	952 x 1333 x 415
	Net Weight ODU (kg)	72	90	113
	Compressor	Compressor Type	Rotary	Scroll
Piping	Suction Tube Size Outer Diameter (mm)	φ19	φ19	φ22
	Liquid Tube Size Outer Diameter (mm)	φ9.52	φ9.52	φ9.52
	Total Max Piping Capability	30	50	50
	Max Piping Height Difference	20	30	30

Model No	UAE	VC36CYFA3-01	VC48CSFA3-01	VC60CSFA3-01
	OMAN	NA	غير مُتاح	VC60CSFA3I-02 VC60CSFA3O-02
	BAHRAIN	NA	غير مُتاح	VC60CSFA3I-04 VC60CSFA3O-04
Performance Parameters	Voltage / Frequency / Phase	220 - 240~ V / 50Hz / 1 Ph	380 - 415~ V / 50Hz / 3 Ph	380 - 415~ V / 50Hz / 3 Ph
	Star Rating - UAE	1 star	1 star	2 star
	Star Rating - OMAN	-	-	7 star
	Rated Cooling Capacity (BTU/h) @ T3	29200	43000	48000
	Rated Power Input (Watt) @ T3	3500	5350	5550
	Rated EER - (BTU/h/Watt) @ T3	8.34	8.04	8.65
	Rated Cooling Capacity (BTU/h) @ T1	33000	48000	54000
	Rated Power Input (Watt) @ T1	2980	4400	4520
	Rated EER - (BTU/h/Watt) @ T1	11.07	10.91	11.95
	Moisture Removal (Liters/Hour)	3.6	4.8	5.5
Air Flow Volume (CFM) (Turbo/High/Low)	1200 / 1124 / 971	1409 / 1341 / 1081	1412 / 1341 / 1147	
Noise Level Indoor (High/Low) in dB(A)	51 / 44	57 / 51	57 / 53	
Features	Filter Configuration	Dust Filter	Dust Filter	Dust Filter
	Evaporator Fins	Hydrophillic Gold Fins	Hydrophillic Gold Fins	Hydrophillic Gold Fins
	Condenser Type	Copper Condenser	Copper Condenser	Copper Condenser
	IDU Dimension (W x H x D) mm	610 x 1925 x 390	610 x 1925 x 390	610 x 1925 x 390
Dimensions, Weight & Input Power Supply	Net Weight IDU (kg)	56	57	57
	Input Power Supply	Outdoor Unit	Outdoor Unit	Outdoor Unit
	ODU Dimensions (W x H x D) mm	946 x 810 x 410	900 x 1170 x 350	952 x 1333 x 415
	Net Weight ODU (kg)	72	90	113
	Compressor	Compressor Type	Rotary	Scroll
Piping	Suction Tube Size Outer Diameter (mm)	φ19	φ19	φ22
	Liquid Tube Size Outer Diameter (mm)	φ9.52	φ9.52	φ9.52
	Total Max Piping Capability	30	50	50
	Max Piping Height Difference	20	30	30

\*Blue Star has a policy of continuous product and product data improvement and reserves the right to change design and specifications without notice.

\* تتبع بلو ستار سياسة التحسين المستمر للمنتجات و بيانات المنتج وتحفظ بحقها في تغيير التصميم ومواصفات دون سابق إنذار