

X WORKS

325/95 R 24 (= 12.00 R 24) 162/160K*

The champion load carrier

- ▶ Lower operational costs
- ▶ Accessibility and mobility on all types of surfaces
- ▶ Increased weight/volume transported

WORKS AND SITES




*162/160K = 9 500 kg SINGLE
and 18 000 kg TWINNED

**MICHELIN
X WORKS XZ**

Steer axle

**MICHELIN
X WORKS XD**

Drive axle






The champion load carrier

X WORKS XZ* 325/95 R 24 (=12.00 R 24)

Steer axle :

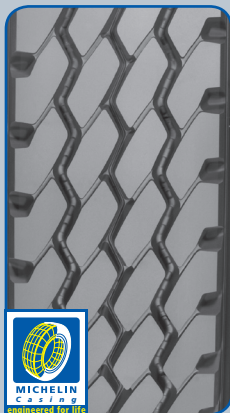

- ▶ **Consistent wear levels :**
better distribution of stress on ground level in the X WORKS XZ contact patch.
- ▶ **More rubber on the ground :**
19 mm tread depth (+1mm compared with the XZY) and wider tread pattern than the 12.00 R 24 XZY.
- ▶ **More kilometres :**
+14% kilometres on tracks and roads, compared with the 12.00 R 24 XZY.



X WORKS XD* 325/95 R 24 (=12.00 R 24)

Drive axle :



- ▶ **Tread is more resistant to tearing :**
new tread pattern MATERIALS.
- ▶ **More kilometres :**
+11% kilometres on tracks and roads, compared with the 12.00 R 24 XDY.
- ▶ **More mobility on all type of surfaces :**
massive tread pattern developed from earthmover technology and 22mm tread depth (+2mm compared with the XDY).




Maximise weight and volumes transported

2 x 18.000 kg

9.500 kg

**Twinned
2 x +3.400 kg**

**Single
+1.500 kg**

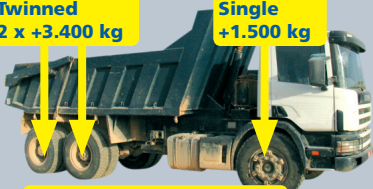


PTAC = 45.500 kg

New load capacity :
162/160K

X WORKS at 8,5 b can carry :

- ▶ **9,500 kg single**
- ▶ **18,000 kg twinned**

Lower utilization costs

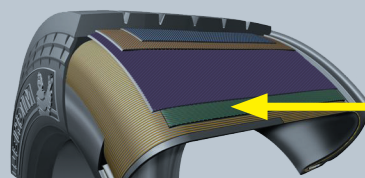

NTS

Resists stress to the crown :
Additional ply : NTS Crown Triangulation Ply

MICHELIN technical truck tyre data :

Load per axle kg		Road pressure		Load index	Dimensional characteristics					New tyre tread depth	Advised rims	Flaps (New flaps 2000)	Tubes
					Dimensions E.T.R.T.O			MICHELIN dimensions					
Single Kg	Twinned Kg	Bar	PSI	Speed symbol	S	D	CdR/RC	R'	E				
325/95 R 24 X WORKS XZ 162/160K TL - X WORKS XD 162/160K TL													
6 400	12 100	5.5	80	162/160K	319	1 250	3 739	562	360	X WORKS XZ 19 mm	8.00V B8.0 8.5 B8.5 9.0	24/25 x8.50	24Q
6 900	13 100	6.0	85										
7 400	14 000	6.5	90										
8 000	15 000	7.0	100										
8 500	16 000	7.5	110										
9 000	17 000	8.0	115										
9 500	18 000	8.5	125										

Very important : MICHELIN 325/95 R 24 X WORKS XZ and X WORKS XD have the same dimensional characteristics as the 12.00 R 24 XZY and XDY. They can be fitted on the same 24x8.50 wheel.

Notice : Availability of products shown in this document may vary from country to country. Please consult your local MICHELIN contact before proceeding.

***May be used with tube**

